



Delphion

Intellectual Property Network

To Search &amp; Research

[IPN Home](#) | [Search](#) | [Order](#) | [Shopping Cart](#) | [Login](#) | [Site Map](#) | [Help](#)

Patent Plaques

## EP983702A1: SECURE MULTINUMBER SIM CARD AND METHOD

[No Image \(See WO09853629\)](#) | [View Cart](#) | [View INPADOC only](#)
[Add to cart: More choices...](#)

Country: **EP** European Patent Office (EPO)

Kind: **A1** Publ. of Application with Search Report

Inventor(s): **TAYLOE, Daniel, Richard**


Applicant(s): **MOTOROLA INC.**  
[News, Profiles, Stocks and More about this company](#)

Issued/Filed Dates: **March 8, 2000 / April 28, 1998**

Application Number: **EP1998000918796**

IPC Class: **H04Q 7/32; H04Q 7/38;**

Priority Number(s): **May 20, 1997 US1997000859194**

Legal Status:  [Show legal status actions](#)

Designated Countries: **AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LI, LU, MC, NL, PT, SE**

Attorney, Agent, or Firm: **Potts, Susan Patricia;**

Family:

Patent	Issued	Filed	Title
<a href="#">WO9853629A1</a>	Nov. 26, 1998	April 28, 1998	SECURE MULTINUMBER SIM CARD AND METHOD
<a href="#">US5933785</a>	Aug. 3, 1999	May 20, 1997	Telephone and method for concurrent registration of two identification numbers using multi-number sim card
<a href="#">SG9853629W1</a>	Nov. 26, 1998		
<a href="#">SE9853629W1</a>	Nov. 26, 1998		
<a href="#">SE983702R1</a>	March 8, 2000		
<a href="#">PT983702R1</a>	March 8, 2000		
<a href="#">NL983702R1</a>	March 8, 2000		

MC983702R1	March 8, 2000	
LU983702R1	March 8, 2000	
LI983702R1	March 8, 2000	
JP9853629W1	Nov. 26, 1998	
IT983702R1	March 8, 2000	
IE983702R1	March 8, 2000	
GR983702R1	March 8, 2000	
GB9853629W1	Nov. 26, 1998	
GB983702R1	March 8, 2000	
FR983702R1	March 8, 2000	
FI9853629W1	Nov. 26, 1998	
FI983702R1	March 8, 2000	
ES983702R1	March 8, 2000	
EP9853629W1	Nov. 26, 1998	
<b>EP983702A1</b>	March 8, 2000	April 28, 1998
DK983702R1	March 8, 2000	
DE9853629W1	Nov. 26, 1998	
DE983702R1	March 8, 2000	
CY983702R1	March 8, 2000	
CN9853629W1	Nov. 26, 1998	
CH983702R1	March 8, 2000	
CA9853629W1	Nov. 26, 1998	
BE983702R1	March 8, 2000	
AT983702R1	March 8, 2000	
31 family members shown above		

SECURE MULTINUMBER  
SIM CARD AND METHOD

Other Abstract Info: DERABS G1999-024984

Foreign References: (No patents reference this one)



**Nominate this  
invention  
for the Gallery...**

**Alternative  
Searches**

**Browse**



Patent Number



Boolean Text



Advanced Text



U.S. Class  
by title



U.S. Class  
by number



IBM Technical  
Disclosure Bulletin

[Privacy](#) | [Legal](#) | [Gallery](#) | [IP Pages](#) | [Advertising](#) | [FAQ](#) | [Contact Us](#)

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/32, 7/38</b>	A1	(11) International Publication Number: <b>WO 98/53629</b>
		(43) International Publication Date: 26 November 1998 (26.11.98)

(21) International Application Number: PCT/US98/08474  
(22) International Filing Date: 28 April 1998 (28.04.98)  
(30) Priority Data:  
08/859,194 20 May 1997 (20.05.97) US  
(71) Applicant: MOTOROLA, INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).  
(72) Inventor: TAYLOE, Daniel, Richard; 14240 S. 7th Street, Phoenix, AZ 85048 (US).  
(74) Agents: INGRASSIA, Vincent, B. et al.; Motorola, Inc., Intellectual Property Dept., P.O. Box 10219 M, Scottsdale, AZ 85271-0219 (US).

(81) Designated States: CA, CN, DE, FI, GB, JP, SE, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

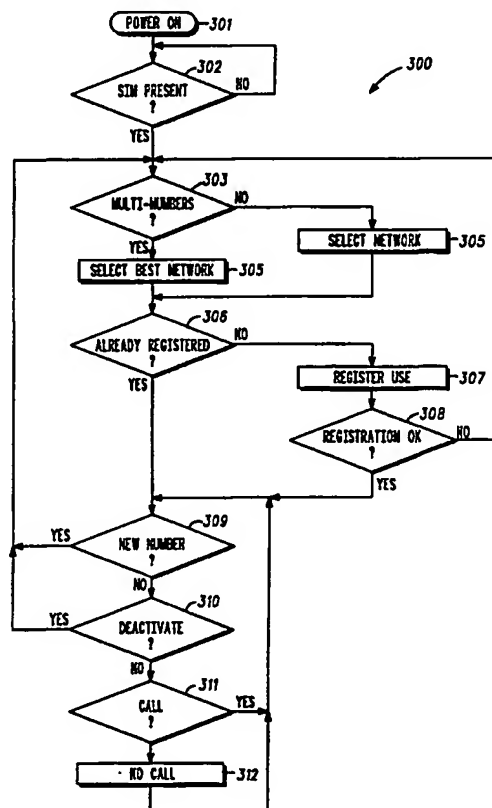
**Published**

*With international search report.  
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: SECURE MULTINUMBER SIM CARD AND METHOD

(57) Abstract

A telephone (101) includes a SIM card reader (107) which receives SIM cards (105). The SIM card may contain two or more telephone numbers for which the phone is activated. One of the numbers may be a temporary number which is linked in use to, for example, a time period. By providing the capability of having two or more numbers on a SIM card, a single phone may respond to incoming calls for a different number of telephone numbers.



## SECURE MULTINUMBER SIM CARD AND METHOD

Field of the Invention

5           The present invention pertains to communication systems, in general, and to personal communication systems of a type utilizing a Subscriber Identification Module (SIM), in particular.

Background of the Invention

10

          In radiotelephone systems such as the Global System for Mobile Communications (GSM) radiotelephone system in use in Europe, a SIM card is inserted into a radiotelephone for providing subscriber identification, billing information and other  
15 information concerning the operation of the radiotelephone. The SIM is a key component of the GSM and typically comprises a smart card which is inserted into a GSM phone in order to make the phone work.

          In a typical cellular telephone communication system, each  
20 subscriber unit is assigned a mobile subscriber (MSI) which uniquely identifies the subscriber unit from other subscriber units. In the European cellular communication system, one such identifier is the international mobile subscriber identification number (IMSI).

25           It is highly desirable to provide a personal communication system which has a single personal telecommunications device which is operable in all available cellular systems, e.g., AMPS, TDMA, CDMA, GSM, etc. across all available cellular frequencies, e.g., 900 MHz or 1800 MHz as well as satellite frequencies, and  
30 which operates like an inexpensive cordless phone when the user is at home.

          In conjunction with such an approach the user has a single phone number, and that phone number tracks that phone such that wherever the phone is, that is where the user is. In those  
35 approaches each universal identification number or telephone number may have multiple network numbers associated with it to permit the single telephone number to be used in different networks.

- 2 -

In the SIM environment, a user is not constrained to carry his own personal communications device on him at all times, since it is SIM plus a generic, non-user specific communications device which the system sees, as opposed to a specialized, user specific device such as a conventional wireline phone or a conventional non-GSM cellular phone. In a network where you have one user-one number, this is desirable.

It may be desirable for a person to have two universal numbers, one for personal communications, and one for work. It seems unlikely that it would be desirable to have a single number used for both work and a personal life, as these two different types of calls usually require different telephone mannerisms when first answering such calls. In such dual number cases, the personal number may be in force almost all the time, while the work number is used primarily at the office but occasionally at home or while in the car. In such case, it would be desirable for the user to be able to receive calls in secure communications mode for both numbers.

In another situation easiest understood by way of an example, a computer network person assigned to a help line may be on call for overnight or weekend emergency service. If the computer help line numbers is on a SIM, a computer network specialist could take that SIM home and place it in his home telephone coupled to the conventional wire line phone and receive help line calls there or in his car phone while driving around town, both using a secure mode of communications. However, at the same time he would like to be able to receive personal calls from his personal number.

- 3 -

Brief Description of the Drawings

5 The invention is pointed out with particularity in the appended claims. However, a more complete understanding of the present invention may be derived by referring to the detailed description and claims when considered in connection with the figures, wherein like reference numbers refer to similar items throughout the figures, and:

10 FIG. 1 is a radiotelephone system in accordance with a preferred embodiment the present invention;

FIG. 2 is an illustration in block diagram form of the radiotelephone system of FIG. 1 in accordance with a preferred embodiment of the present invention; and

15 FIG. 3 is a flow chart of the operation of the radiotelephone of FIGS. 1 and 2 in accordance with a preferred embodiment of the present invention.

20 The exemplification set out herein illustrates a preferred embodiment of the invention in one form thereof, and such exemplification is not intended to be construed as limiting in any manner.

- 4 -

Detailed Description of the Drawings

U.S. Patents 5,615,260; 5,257,414 and 5,444,764 all issued to Motorola, Inc., the assignee of the present invention, are  
5 incorporated herein by reference.

FIG. 1 is a block diagram of a radiotelephone communications system in accordance with the present invention. The fixed site transceiver 103 transmits and receives radio frequency (RF) signals to and from mobile and portable  
10 radiotelephones located within a fixed geographic service area. Radiotelephone 101 is one of the portable radiotelephones served by the fixed site transceiver 103. The RF signals transmitted between the fixed site transceiver 103 and the portable radiotelephone 101 include data or voice signals, subscriber  
15 identification, and billing information. The billing information sent from the portable radiotelephone 101 to the fixed site transceiver 103 is stored in a memory contained on SIM cards 105. Each SIM card 105 can be a full size or a chip size smart card. The billing information contained within the SIM card 105  
20 is read by a card reader contained within the radiotelephone 101. The card reader may be of the type described in the aforementioned U.S. Patent 5,615,260.

FIG. 2 is an illustration in block diagram form of the radio telephone system of FIG. 1. In the radio telephone system, a  
25 portable transceiver 101 sends and receives radio frequency (RF) signals to and from mobile and portable radio telephones within a fixed geographic area served by the fixed site transceiver 103. Radio telephone 101 is one such radio telephone served by the transceiver 103.

30 Upon power-up of the radiotelephone 101, a SIM card 105 is inserted by the user into the SIM card reader 107 contained within the radiotelephone 101. Upon insertion of the SIM card 105, the radiotelephone 101 prompts the user through the user interface 109 to insert a personal identification number (PIN) to  
35 unlock the SIM card allowing access to the subscriber information contained therein. In other embodiments, the SIM card may not

- 5 -

require the entry of a PIN number to unlock the subscriber information contained therein. Upon entering the SIM card access PIN, the radiotelephone 103 executes the process 300 illustrated in FIG. 3 and subsequently described in detail. After successfully  
5 completing the process 200, a radiotelephone 101 is fully registered for service in the radiotelephone system 100 of FIG. 1. The radiotelephone 101 is now able to send and receive RF signals from the remote transceiver 101.

While receiving RF signals from the transceiver 103, the  
10 radio telephone 101 uses the antenna 111 to couple the RF signals and to convert the RF signals into electrical RF signals. The electrical RF signals are received by the radio receiver 113 for use within the radio telephone 101. The receiver 113 demodulates the received electrical RF signals and outputs an  
15 information signal for use by the controller 117. The controller 117 formats the information signal into voice or data for use by the user interface 109. The controller 117 includes a microprocessor, such as a MC68332 available from Motorola, Inc., and memory devices such as RAM and EEPROM. The user interface  
20 109 is used to convey information between a user and the radio telephone 101, typically including a microphone, a speaker, a display, a data port and a keypad.

Upon the transmission of the RF signals from the portable radio telephone 101 to the transceiver 103, the voice and/or data  
25 signals from the user interface 109 are processed by the controller 117. The processed signals are input into the transmitter 115. The transmitter 115 converts the data into electrical RF signals. The electrical RF signals are converted into RF signals and output by the antenna 111. The RF signals are  
30 received by the transceiver 103 and converted for use with a land line telephone system.

Prior systems allow one number, e.g., a work number, to be forwarded to a home phone. However, the home phone number is usually shared between all family members, which makes it  
35 difficult to automatically redirect calls for just one member of

- 6 -

the family to another phone, such as to a cellular phone or a work phone.

In accordance with the principles of the invention a communications device 101 is provided with the capability to  
5 accept a SIM card 105 having multiple universal numbers, each with its own user specific encryption algorithms. The communication device 101 is therefore able to provide service for more than one user and in particular, to be able to accept incoming calls. For each different universal identification  
10 number, the device 101 can keep track of the encryption necessary for each number and, if necessary, register that number on the system currently providing service.

For a conventional wire line communications unit (a corded or cordless phone), the unit contacts the network service provider  
15 such that all incoming calls will be routed to this communications unit, encrypted as specified by the SIM card 105.

A communications device with multiple universal identification number capability allows a person to accept calls at a single communication device for either his personal number,  
20 his work number or for both at the same time. Alternatively, several different people each with different numbers (on one SIM card) can receive secure calls on a common communications device on a dynamic basis.

The invention provides a method of dealing with multiple  
25 secure numbers per user (work/business/personal) as well as multiple users per secure communications unit (such as a family with several different personal numbers).

Where a single user has two or more universal numbers assigned to him/her, such as one for personal communications,  
30 and one or more for other purposes such as work, the personal number may be used almost all the time, but the work number may be used primarily at the office but occasionally at home or while mobile. In accordance with the invention, a single SIM contains information pertaining to more than one universal number,  
35 including multiple sets of encryption data, one or more sets per number. The communications device 101 that the SIM card 105 is

- 7 -

inserted allows selective enabling and/or disabling of the individual numbers contained on the card and selectively choosing the encryption data set to be used with that number. The communications device 101 indicates which number an incoming call is for, so that the user can answer the call appropriately. For outgoing calls, the capability is provided to select which of the numbers on the SIM to access the system as (i.e.: which number to charge against) when placing the call.

The user may receive a secure communications destined for one or more numbers. For example, the user could keep his personal number enabled at all times, so that he can receive calls to that number at all times. His second number, if associated with work, may be selectively turned on or off so as to only receive secure work calls at certain times. The on/off period of a given number may be preprogrammed so that secure communications over that number can be enabled only during certain predetermined hours, perhaps depending also on the day of the week. In this way, a person who is only supposed to handle emergency calls during evenings or weekends could automatically enable that number during those times.

Turning now to FIG. 3, operation of the telephone device 101 with a SIM card 105 having multiple universal numbers is described. The operations are performed by the controller 117 through programmed operation.

For purposes of clarity it is emphasized that the term "multiple universal numbers" means separate identification numbers representing different functional identities or telephone numbers rather than the same identity or telephone number on different system networks.

After the phone is turned on in step 301, the phone 101 checks in step 302 to see if there is a SIM card 105 present. If there is no SIM card 105 present, the phone 101 will wait for one to be inserted before continuing.

When it is determined that an SIM card 105 is present, step 303 checks to see if the SIM card 105 has data for more than one providing network (wireless or even wireline). If there are no

- 8 -

available networks the phone will indicate that there is no service available.

If there is data for more than one network, the best network is selected in step 304. Step 304 involves searching to  
5 determine which networks are currently available, and selecting among these based upon factors such as personal preference, cost, reliability, and perhaps throughput (in the case of data transactions).

There may be multiple universal numbers on this card and  
10 each universal number may have associated with it several allowed networks (wireless or otherwise). The phone only monitors incoming calls on a single system, and the "best" system will need to take into account the needs of all the universal numbers and their associated allowable networks, and try to pick  
15 a "best" system that represents common ground for all the allowable universal numbers on the SIM card 105.

Certain phones may monitor for rings on more than one network, limited to perhaps two at a time or only certain combinations. For example, a dual receiver phone may be able to  
20 listen to two separate systems at the same time. For such phones able to listen for incoming calls on more than one system, the universal numbers may be registered on different systems.

If there is data for only one network indicated on the SIM card 105, that network service is selected in step 304.

25 After a service is selected, step 306 checks to determine for each universal number, if that number is already registered on the selected network. If a universal number is not already registered on the selected network, the phone 101 attempts to register the user on the selected network in step 307.

30 In step 308 a determination is made whether the registration attempt is successful. If the attempted registration attempt is not successful, the unit will go back to step 303 and attempt to select another network, removing from consideration the network that just failed for that particular universal number.

- 9 -

The failure of one number to get registered will cause the phone to select another "best" system for the other universal number as well.

Once all the SIM cards' universal numbers have been  
5 registered that can be registered, the phone 101 waits for one of  
the following to happen: receipt of an incoming phone call (step  
311), activation of an additional universal number (step 309) or  
deactivation of a universal number (step 310). If no call is  
10 detected, the phone 101 cycles back to step 309. If a call is  
detected, the phone call is processed in conventional fashion  
(step 312). When the call is complete the phone 101 cycles back  
to step 309.

When an incoming call is received at step 311, the phone  
101 alerts the user of an incoming call and indicates which  
15 number it is for. The phone may differentiate between the  
universal numbers by different audio tones for tone sequences, or  
visually such as via a display indicating the universal number the  
call is for. The differentiation is done by the controller 117.  
When an incoming call is received, the phone 101 will check for  
20 the security preference for that network and that number and will  
or will not activate secure communications based upon those  
preferences. Security normally means voice and data  
encryption/decryption.

These preferences may also be manually over ridden by the  
25 user. Alternatively, the incoming call may indicate a desired  
security preference which the controller 117 will respond to,  
given the security information on the SIM card 105.

When an out going call is made, the user must select which  
universal number against which to place the call. Preferences for  
30 security from the SIM card can either be automatically applied or  
manually invoked. In either case, the controller 117 operates to  
provide the security. "Security" means encrypting/decrypting the  
incoming and out going voice and/or data.

If an additional universal number is activated, the universal  
35 number activated may be either a permanent or a temporary  
number. The additional number may be activated by keying in an

- 10 -

additional PIN number on the keypad of the phone 101. A permanent number is one that is not user alterable on the SIM card. A user may selectively enable or disable numbers that the phone is looking for incoming calls for. For example, a user may have a  
5 universal number corresponding to his normal work identity, such as an engineer, and another corresponding to his private life. After hours, he may not want to be disturbed by calls from work, so that universal number can be deactivated, either manually or automatically via a stored schedule.

10 The deactivation process can reside in either the SIM card 105 or in the phone controller 117. In either case, the SIM card 105 may optionally contain a program schedule for activation/deactivation for each number. If the phone 101 is taking care of this, the controller 117 can read the schedule  
15 information on the SIM card 105 and, knowing the current time, can itself determine when to activate or deactivate the number. Alternatively, the SIM card 105 can keep track of time itself, and activate/deactivate the number at the appropriate time by notifying the phone.

20 A temporary number is a universal number that can be added or deleted by the user from the SIM card 105. An example of this might be a computer "help desk" function. Several staff members may take turns being responsible for answering questions to this number over the weekend. When it is one particular persons turn,  
25 his SIM card 105 can be loaded with a "temporary" number associated with the "help desk" number, valid for his weekend duty. This temporary number may have an expiration time associated with it for automatic deletion or may be manually deleted or deactivated. The temporary number may either be  
30 entered manually via a user interface, or copied from an original SIM card 105 via a phone unit.

In either case, the activation of a new universal number in step 309 results in step 303 being revisited in order to reevaluate the "best" network, given the new universal number  
35 and the networks valid for it.

- 11 -

When a number is deactivated step 310 deregisters the user with the network it was connected to. This would normally occur when the SIM is withdrawn from the phone, but may happen according to a scheduled event (turn off a number at a scheduled time) or alternatively may be manually invoked (user no longer wants to receive calls on that number).

When a number is deactivated (manually or automatically, either a permanent or temporary number), step 303 is revisited in order to determine if the "best" network now needs to change for remaining activated numbers.

In the above described embodiment, it is assumed that a SIM card 105 needs to be present in the phone 101 the entire time the phone 101 is watching for incoming calls. If the SIM card 105 is removed, the numbers on the SIM card 105 are deactivated in the phone 101 and may be detached (un-registered) with the network it is registered with.

In an alternative embodiment, the SIM card 105 could be placed in the phone long enough for the phone just to read the information on the SIM. From there, the phone would act as if the SIM card 105 is in the phone.

The data may be copied from a SIM card 105 into the phone 101. Phone 101 could register and use the numbers on the SIM until the SIM is used elsewhere in the network. At that point in time, as the numbers are registered with the new device, they would detach (un-registered) with the last used phone. This embodiment changes the above flow chart of FIG. 3 in that there is no deactivation upon the removal of the SIM as shown in step 310.

The various steps described in conjunction with FIG. 3 are performed by the controller 117 as programmed functions.

As will be understood by those skilled in the art, various changes may be made to the embodiments described above without departing from the spirit and scope of this invention.

- 12 -

## CLAIMS

What is claimed is:

5

1. A method of controlling access of a telephone in a telephone system comprising the steps of:

accepting a subscriber identification module (SIM) card in said telephone, said SIM card containing a first universal  
10 identification number and a second universal identification number;

registering said telephone in said telephone system using said first universal identification number; and

registering said telephone in said telephone system using  
15 said second universal identification number, said second universal identification number being registered concurrently with said first universal identification number.

2. A method in accordance with claim 1, comprising the steps  
20 of:

determining from said SIM card if it contains first data for said first universal identification number for more than one providing telephone network;

determining from said SIM card if it contains second data for  
25 said second universal identification number for more than one providing telephone network; and

selecting a telephone network for registering said first and second universal identification numbers based upon said first and second data.

- 13 -

3. A method in accordance with claim 1, comprising the steps of:
- determining from said SIM card if it contains first data for more than one providing network for said first universal identification number and selecting a first network for registration of said first universal identification number;
- determining from said SIM card if it contains second data for more than one providing network for said second universal identification number and selecting a second network for registration of said second universal identification number; and attempting to register said first universal identification number with said first network.
4. A method in accordance with claim 3, comprising the step of:
- determining whether said registration attempt is unsuccessful; and
- attempting to register said first universal number with an alternate network if said attempt is unsuccessful.
5. A method in accordance with claim 3, comprising the steps of:
- attempting to register said second universal identification number with said second network;
- determining whether said registration of said second universal identification number is unsuccessful; and
- attempting to register said second universal identification number with another network if said attempt is unsuccessful.
6. A method in accordance with claim 1, comprising the steps of:
- providing a first alert indication to indicate incoming calls are for said first universal identification number; and
- providing a second alert indication to indicate incoming calls are for said second universal identification number.

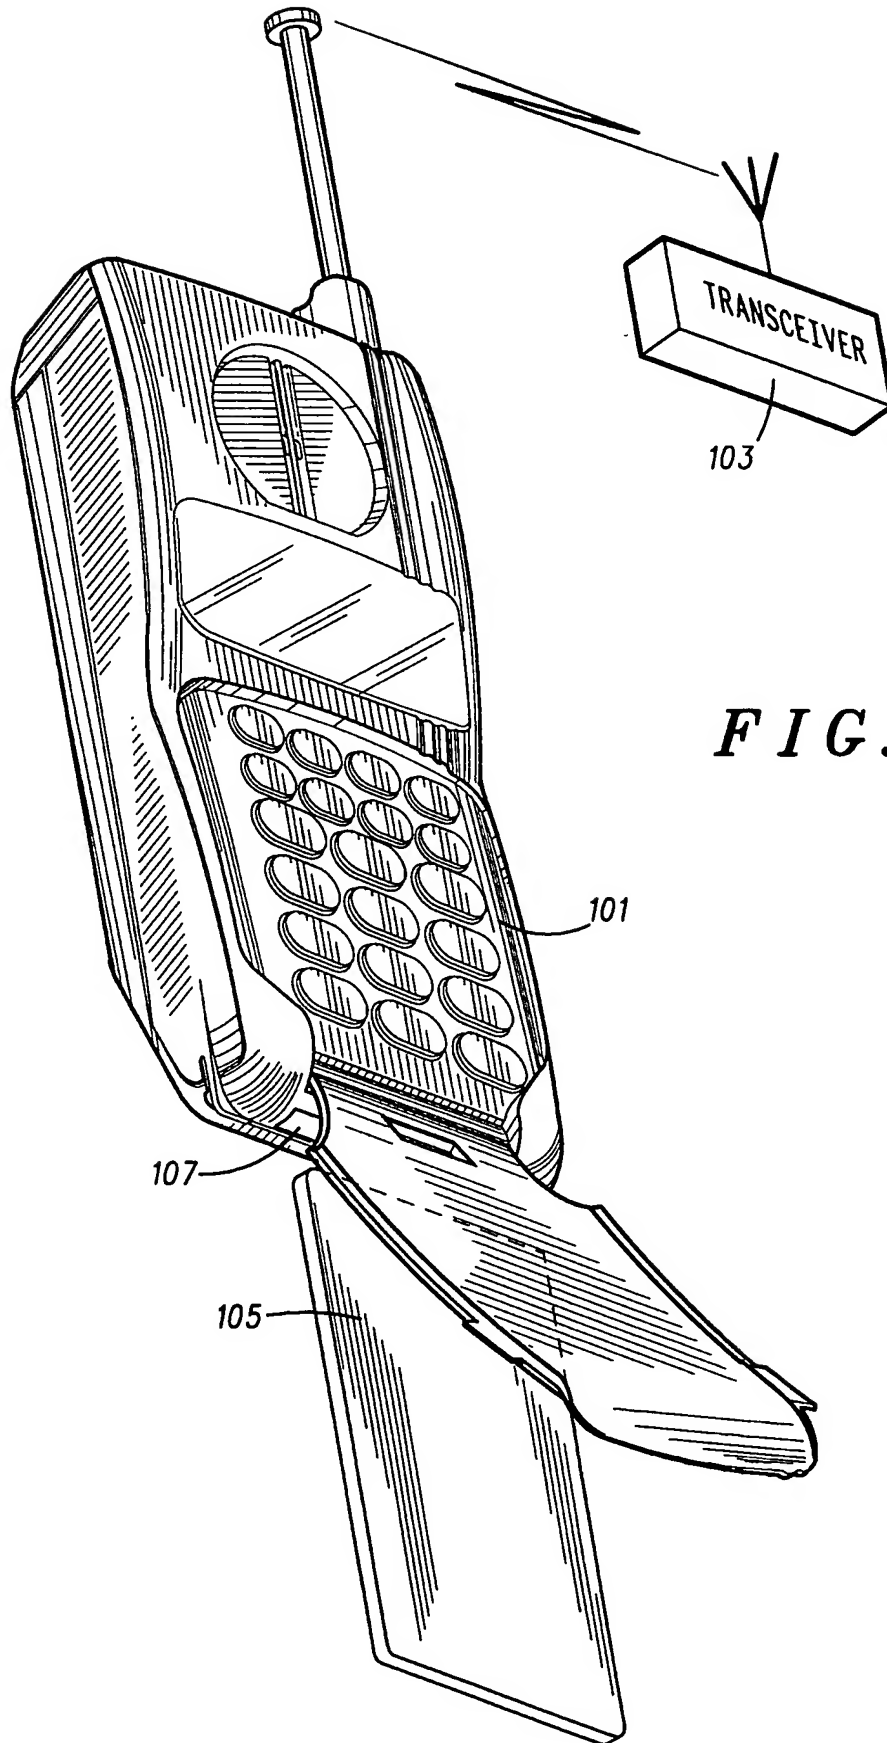
- 14 -

7. A method in accordance with claim 1, comprising the steps of:
- deregistering said first universal identification number upon removal of said SIM card from said telephone;
  - 5 deregistering said first universal identification number upon the occurrence of a predetermined activity.
8. A cellular telephone comprising:
- means for accepting a subscriber identification module (SIM) card (107), said SIM card containing a first universal identification number and a second universal identification number;
  - means for registering said telephone in a telephone system using said first universal identification number;
  - 15 means for registering said telephone in said telephone system using said second identification number;
  - means for determining from said first SIM card if said SIM card contains first data for said first universal identification number for more than one providing telephone network and for
  - 20 determining if said SIM card contains second data for said second universal identification number for more than one providing telephone network;
  - means for selecting a telephone network for registering said first universal number based upon said first data;
  - 25 means for selecting a telephone network for registering said second universal number based upon said second data;
  - means for attempting to register said first universal identification number with a first network corresponding to said first data;
  - 30 means for selecting a telephone network for registering said second universal identification number with a network corresponding to said second data.

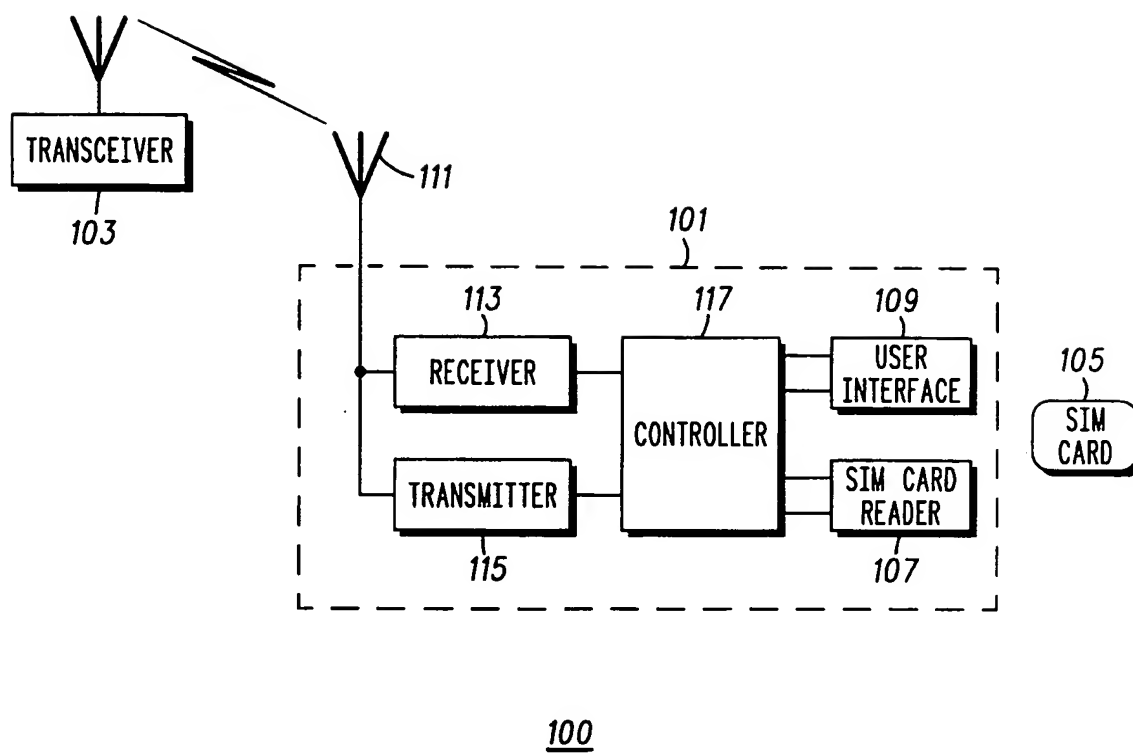
- 15 -

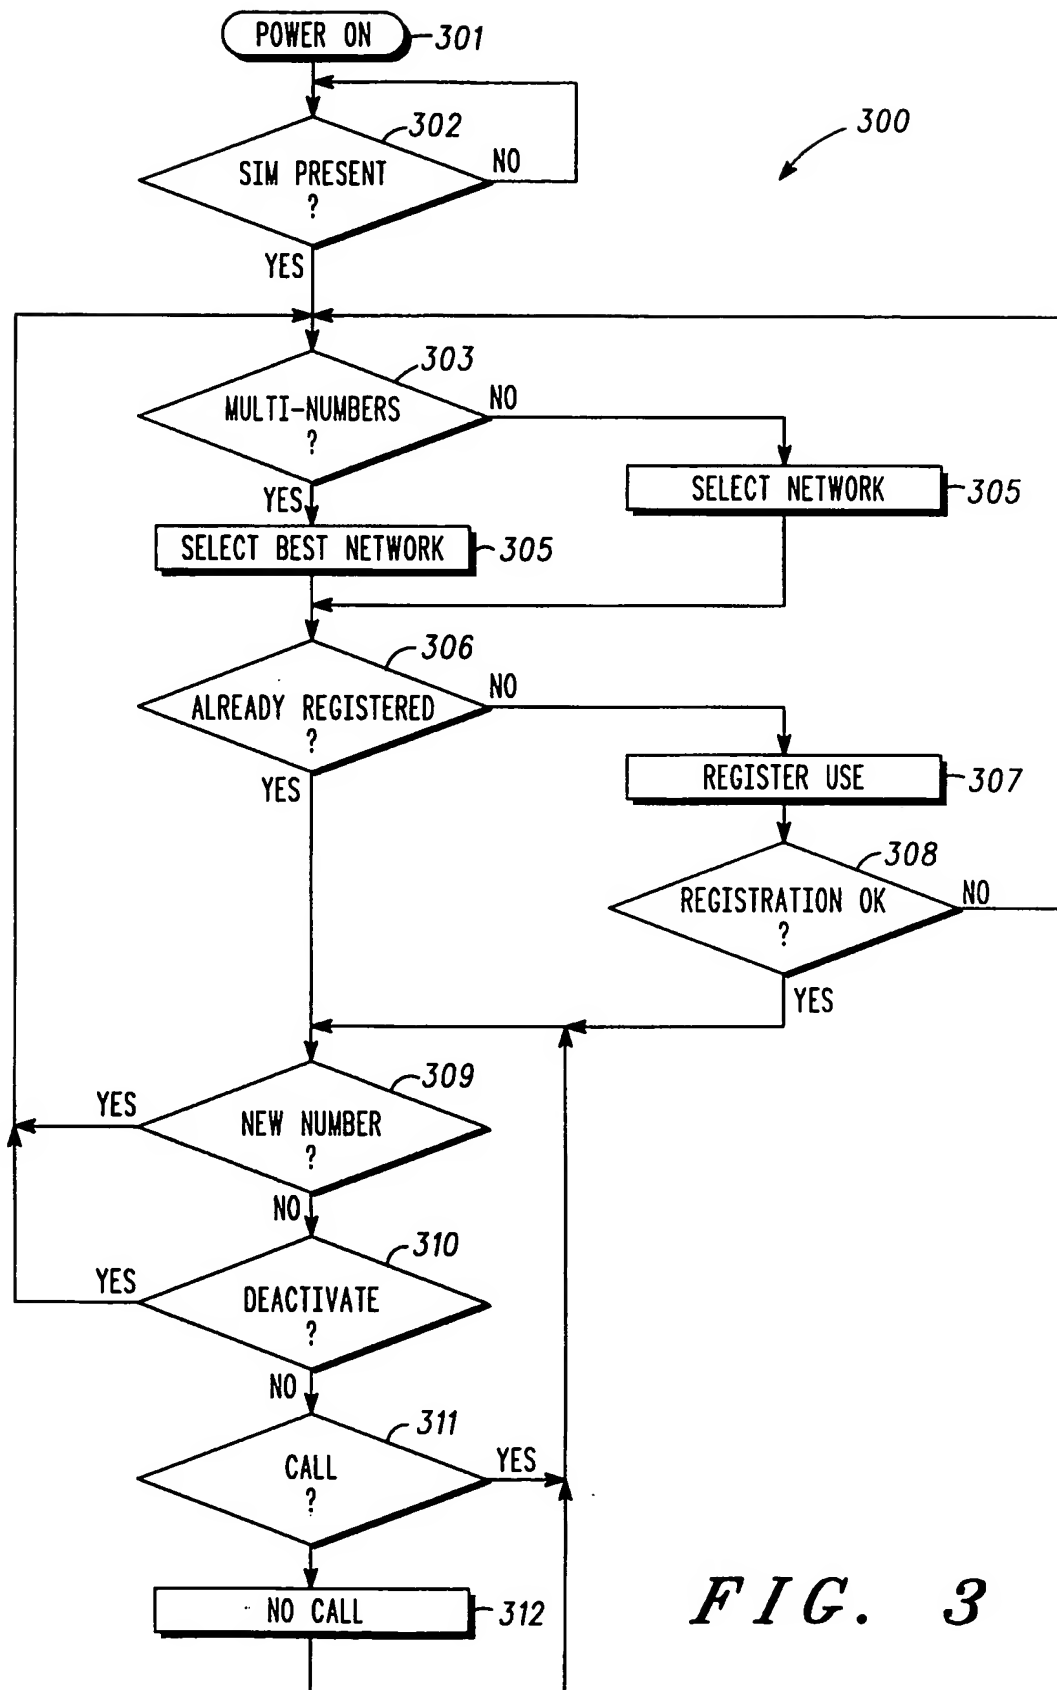
9. A telephone comprising:  
SIM card receiving apparatus (107);  
circuitry reading first and second universal identification  
numbers from a SIM card received in said receiving apparatus;  
5 telephone network accessing circuitry; and  
a processor receiving said first and second identification  
numbers from said SIM card and for operating said accessing  
circuitry to register said first and second universal  
identification numbers.
- 10
10. A telephone as claimed in claim 9 wherein:  
said reading circuitry reading first data associated with said  
first universal identification number and second data associated  
with said second universal identification number; and  
15 said processor being operable to use said first and second  
data to attempt to register said telephone with telephone  
networks through said accessing circuitry.

1/3

*FIG. 1*

2/3

**FIG. 2**

**FIG. 3**

# INTERNATIONAL SEARCH REPORT

1. national Application No

PCT/US 98/08474

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H04Q7/32 H04Q7/38

According to International Patent Classification(IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 41 18 993 A (AEG MOBILE COMMUNICATION) 10 December 1992	9,10
A	see column 1, line 59 - column 4, line 6 ---	1-8
A	US 5 371 781 A (ARDON MENACHEM T) 6 December 1994 see column 2, line 33 - column 4, line 14 see claims 1-15 ---	1-10
A	EP 0 681 408 A (GEMPLUS CARD INT) 8 November 1995 see column 3, line 33 - column 6, line 10 see column 7, line 3-56 ---	1-10
A	GB 2 284 964 A (NIPPON ELECTRIC CO) 21 June 1995 see page 9, line 3 - page 16, line 14 -----	1-10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

8 September 1998

Date of mailing of the international search report

14/09/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Roberti, V

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/08474

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 4118993 A	10-12-1992	NONE	
US 5371781 A	06-12-1994	CA 2126477 A EP 0647075 A	31-03-1995 05-04-1995
EP 0681408 A	08-11-1995	FR 2719436 A DE 69500083 D DE 69500083 T ES 2095782 T	03-11-1995 19-12-1996 03-04-1997 16-02-1997
GB 2284964 A	21-06-1995	AU 687463 B AU 8040394 A JP 7226974 A US 5590397 A	26-02-1998 22-06-1995 22-08-1995 31-12-1996